


BOOSTER20

VOLUME OUTPUT (CYPH)	20 yd/hr
MAX. AGGREGATE SIZE	1 in
PISTON FACE PRESSURE	1000 psi
HORIZ. PUMPING DISTANCE	800 ft
VERT. PUMPING DISTANCE	150 ft
CONCRETE VALVE S-TUBE	4.5 in x 4 in
CONCRETE CYLINDERS	4.5 in x 30 in
PUMP OUTLET	4 in
HOPPER CAPACITY	7 cf
DIESEL ENGINE	28 hp
HEIGHT	5'
WIDTH	4'10"
LENGTH	13'5"
WEIGHT	3100 lbs

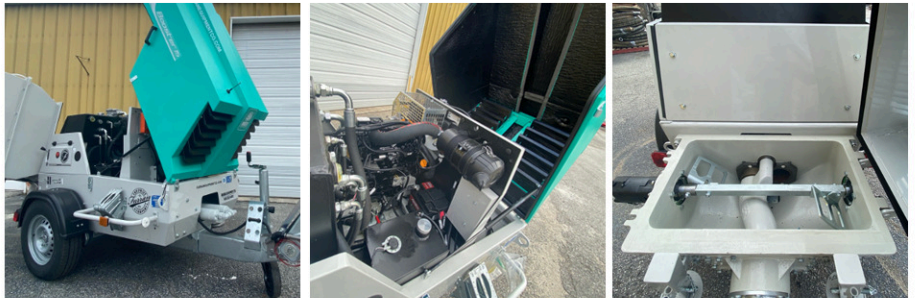

DETAILS

The Booster²⁰ is BIG power in a little package. Imported from Italy, where tight spaces dictate the need for compact design, the Booster²⁰ sports a 28 hp Yanmar engine pushing 4 1/2" cylinders and generating a piston face pressure of 1000 psi. Capable of pushing distances of over 800' through a 2" line, the Booster²⁰ is lightweight, durable, and immensely quiet. It is also one of the most equipped concrete pumps, with standard features such as an automatic greaser, agitator, vibrator, and a radio remote with volume control. Considering it is also the least expensive line pump on the market, the Booster²⁰ is the biggest *bang for your buck* in the world of general purpose concrete pumping.

CONTROL PANEL



Stainless steel control panel complete with LED indicators and hydraulic gauges

STANDARD EQUIPMENT

- Automatic greasing system
- Casted Steel hopper with agitator
- Vibrating grid, 12V
- Radio Remote with volume control
- 4" Heavy Duty delivery manifold
- Electromechanical control panel
- Piston head tool kit
- Heavy duty highway tow package
- Accessory box with grease pump
- Centralized grease ports

