


## ZR-430

Theoretical Grout Output (C.Y.P.H.)	22
Piston Head Pressure	650 psi
Maximum Aggregate	3/4" minus
Concrete Cylinder Diameter	4"
Concrete Cylinder Stroke	30"
Discharge Diameter	4"
Material Valve	S-Tube
Main Hydraulic Pump	Piston
Hydraulic Tank Capacity	44 gal
Diesel Engine	57 HP
Fuel Tank Capacity	15 gal
Hopper Capacity	8 cu. ft.
Axle	Single
Tires	15"
Brakes	Electric
Length	150"
Width	64"
Hopper Height	43"
Weight (dry):	3100 lbs



### DETAILS

The ZR-430 was designed with masons in mind. This powerhouse pump is perfect for 2" linework including block-fill, footers, and slabs. Easy to understand and operate, this pump features a fully mechanical hydraulic cycle system with limited electronic controls. Unlike other pumps, the ZR-430 will never fail due to a faulty relay or proximity switch. Equipped with a manual override system, this pump can finish the job in the event of electrical complications.

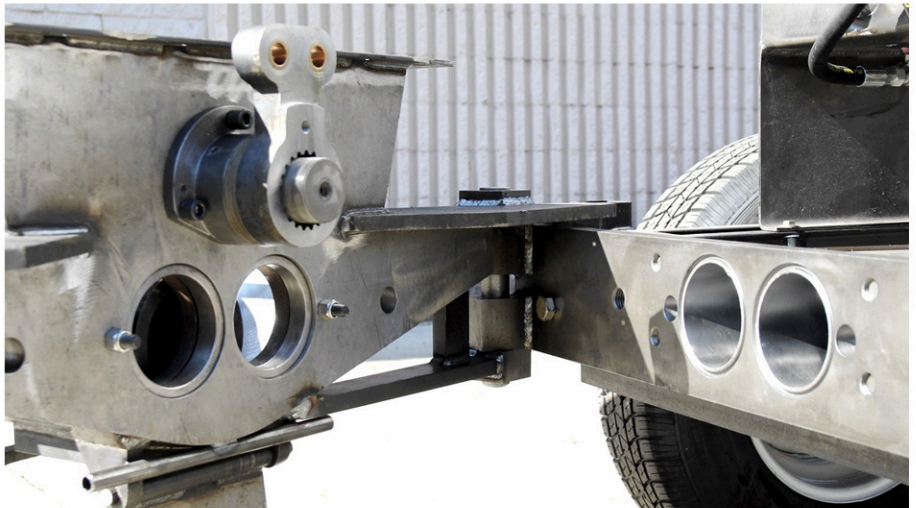

### HINGE VALVE

Reinert Masonry Pumps are built with the innovative Hinge Valve design. When in the open position, this Hinge Valve gives you access to the inside of the S-Tube allowing for easy cleanout of built up material. This also makes the piston cups visible and easy to change. When clean-up and maintenance go faster and easier, you save time, labor, and money.